


DATA SHEET SWISSCAVE WL30F

Technical Data

Exterior	
Casing	Black coated steel
Door glazing	Fully glazed UV-resistant, gas-filled, with low energy panes equipped glass door (double glazed)
Door frame	Filigree edging made of black anodised, brushed aluminium
Door handle	Anodised, brushed aluminium (rectangular) (optionally available)
Door hinge	Right
Door hinge convertible as option (right to left)	Yes
Product dimensions without door handle (H/W/D)	820 x 150 x 525 mm
Packaging dimensions (H/W/D)	845 x 185 x 580 mm
Interior	
Temperature zones	1
Lighting	Blue ceiling lighting
Lighting on/off switch	Yes
Inside casing	Black PUR
Scope of functions	
Optimal usage	Long-term storage and aging
User interface	Celsius/Fahrenheit switch
Active carbon filters (ensuring optimal air quality)	Yes
Compressor	JP-STD
Coolant	R600a (environment friendly)
Vibrationfree implementation	Yes
Cooling system	Combined fan and convection cooling
Defrost function	Automatic
Temperatur Memory Function (Power failure)	Yes
Condensation water container	Yes
Acoustic temperature alarm	Yes
Acoustic door alarm	Yes
Tilt protection	Yes
Feet adjustable to compensate uneven floors	Yes

Performance data	
Bottle capacity (Bordeaux shape)	9
Space for oversized bottles (Magnum, 3lt.)	On top and bottom shelf
Humidity	Recommendation 50-70%
Climate classification	SN-T
Volume	22 l
Noise level	39 dB(A) sound-absorbing recommendation
Temperature range	5 °C - 20 °C
General Information	
Cooler shape	Freestanding or built-in with shadow gap
Maintenance contract (warranty extension)	Recommended
Transport weight	22 kg
Net weight	20 kg
Power consumption per day	0,375 kWh (ca.)
Voltage	220 V / 50 Hz
Cable length	2 m



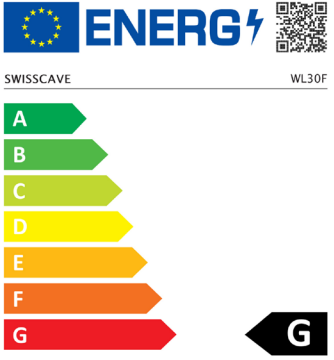

SWISSCAVE WL30F

A

B

C

D

E

F

G

137 kWh/annum

9 bottles

39 dB(A) AB CD

2019/2021