

DATA SHEET SWISSCAVE WLB-460FLD

Technical Data


Exterior	
Casing	Black coated steel
Door glazing	Fully glazed UV-resistant, gas-filled, with low energy panes equipped glass door (3-layer glazing)
Door frame	Filigree edging made of black anodised, brushed aluminium
Door handle	Anodised, brushed aluminium (rectangular) (optionally available)
Door lock	Yes
Door hinge	Right
Door hinge convertible as option (right to left)	Yes
Product dimensions without door handle (H/W/D)	1720 x 595 x 725 mm
Packaging dimensions (H/W/D)	1750 x 630 x 762 mm

Interior	
Temperature zones	1
Lighting	all around illumination white, blue, amber (adjustable)
Lighting on/off switch	Yes
Number of shelves total	7
Number of display shelves (for perfect wine presentation)	7 (other shelf types)
Number of bottle levels max.	17
Shelf material	Raw natural sapele (Mahogany) wooden display shelves with attractive grip bars
Telescopic shelves on extendable steel ball bearings	Full extension shelves (80%)
Inside casing	Black PUR

Scope of functions	
Optimal usage	Long-term storage and aging
User interface	2 digital displays (set and actual temp.)
Active carbon filters (ensuring optimal air quality)	Yes
Compressor	Embraco Fullmotion (speed-controlled)
Coolant	R600a (environment friendly)
Vibrationfree implementation	Yes
Cooling system	Combined fan and convection cooling
Defrost function	Automatic
Temperatur Memory Function (Power failure)	Yes
Condensation water container	Yes
Heating	Yes (integrated powerful winter function)
Acoustic temperature alarm	Yes
Tilt protection	Yes
Feet adjustable to compensate uneven floors	Yes

Performance data	
Bottle capacity (Bordeaux shape, part of shelves removed)	210
Bottle capacity (Bordeaux shape, all shelves inserted)	140/180
Space for oversized bottles (Magnum, 3lt.)	On top and bottom shelf
Humidity	Recommendation 50-70%
Climate classification	SN-T
Volume	379 l
Noise level	38 dB(A) sound-absorbing recommendation
Temperature range	5°C - 20°C

General Information	
Cooler shape	Freestanding or built-in with shadow gap
Maintenance contract (warranty extension)	Recommended
Transport weight	125 kg
Net weight	110 kg
Power consumption per day	0,378 kWh (ca.)
Voltage	220 V / 50 Hz
Cable length	2 m

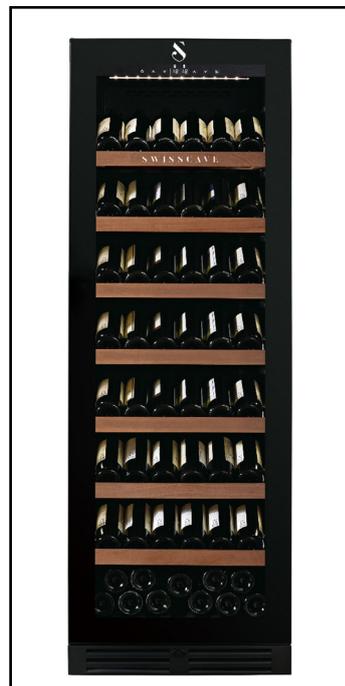



SWISSCAVE WLB-460F

A	Green arrow pointing right
B	Green arrow pointing right
C	Light green arrow pointing right
D	Yellow arrow pointing right
E	Orange arrow pointing right
F	Red arrow pointing right
G	Red arrow pointing left

138 kWh/annum



180



38dB
ABCD

2012/6/10