

DATA SHEET SWISSCAVE WLI-160DF

Technical Data


Exterior	
Casing	Black coated steel
Door glazing	Fully glazed UV-resistant, gas-filled, with low energy panes equipped glass door (double glazed)
Door frame	Filigree edging made of black anodised, brushed aluminium
Door handle	Anodised, brushed aluminium (rectangular)
Door lock	Yes
Door hinge	Right
Door hinge convertible as option (right to left)	Yes
Product dimensions without door handle (H/W/D)	885 x 592 x 555 mm
Packaging dimensions (H/W/D)	975 x 655 x 640 mm

Interior	
Temperature zones	2
Lighting	all around illumination white, blue, amber (adjustable)
Lighting on/off switch	Yes
Number of shelves total	5
Number of display shelves (for perfect wine presentation)	0 (other shelf types)
Number of bottle levels max.	7
Shelf material	Raw natural sapele (Mahogany) wooden display shelves with attractive grip bars
Telescopic shelves on extendable steel ball bearings	Full extension shelves (80%)
Inside casing	Black PUR

Scope of functions	
Optimal usage	Tempering and storing
User interface	2 digital displays (set and actual temp.)
Active carbon filters (ensuring optimal air quality)	Yes
Compressor	JP-STD
Coolant	R600a (environment friendly)
Vibrationfree implementation	Yes
Cooling system	Combined fan and convection cooling
Defrost function	Automatic
Temperatur Memory Function (Power failure)	Yes
Condensation water container	Yes
Acoustic temperature alarm	Yes
Acoustic door alarm	Yes
Tilt protection	Yes
Feet adjustable to compensate uneven floors	Yes

Performance data	
Bottle capacity (Bordeaux shape, all shelves inserted)	40
Space for oversized bottles (Magnum, 3lt.)	On bottom shelf
Humidity	Recommendation 50-70%
Climate classification	SN-T
Volume	100 l
Noise level	39 dB(A) sound-absorbing recommendation
Temperature range	5 °C - 16 °C 9 °C - 20 °C 1 °C - 2 °C
General Information	
Cooler shape	Kitchen-built-in
Maintenance contract (warranty extension)	Recommended
Transport weight	51 kg
Net weight	47 kg
Power consumption per day	0.427 kWh (ca.)
Voltage	220 V / 50 Hz
Cable length	2 m



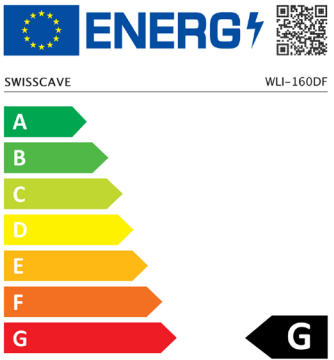

SWISSCAVE WLI-160DF

A
B
C
D
E
F
G

156 kWh/annum

40 bottles

39dB
ABCD

2022/01/20